

## Continuous Peeler

### Description

The Watson & Brookman Continuous Peeler features an series of rollers arrayed in line with product flow. A central auger pushes product through the peeler to the outfeed.

Rollers are available as abrasive coating or brushes, depending on product and finish required.

Highly robust, the Continuous Peeler is suitable for high volume processing operations.



Waste collection and processing solutions are available to complement this machine.

### Construction

Fully stainless steel construction as standard with carborundum coated rollers.

Guarded top hatch and clean out doors allows for easy and safe access for cleaning and maintenance.




## Technical Specification

	<b>2000 / 6R</b>	<b>3000 / 6R</b>	<b>3000 / 8R</b>
<b>Capacity</b>	2000Kg/Hr	3000Kg/Hr	4000Kg/Hr
<b>Product Infeed</b>	Continuous	Continuous	Continuous
<b>Dimensions (LxWxH)</b>	3193 x 1360 x 2370mm	4197 x 1360 x 2370mm	4450 x 1690 x 2620
<b>Rollers</b>	6 @ Ø150	6 @ Ø150	8 @ Ø150
<b>Power Consumption</b>	2 x 2.2Kw, 1 x 0.37Kw	2 x 2.2Kw, 1 x 0.37Kw	4 x 2.2Kw, 1 x 0.37Kw
<b>Materials</b>	Stainless steel bead blasted. Drive components and bearings a mix of Stainless and Mild Steel.	Stainless steel bead blasted. Drive components and bearings a mix of Stainless and Mild Steel.	Stainless steel bead blasted. Drive components and bearings a mix of Stainless and Mild Steel.

## Dimensional Drawing

	<b>2000 / 6R</b>	<b>3000 / 6R</b>	<b>3000 / 8R</b>
<b>Dim A</b>	3193	4197	4450
<b>Dim B</b>	1360	1360	1690
<b>Dim C</b>	2370	2370	2620
<b>Dim D</b>	1720	1720	1720
<b>Dim E</b>	1061	1061	1090

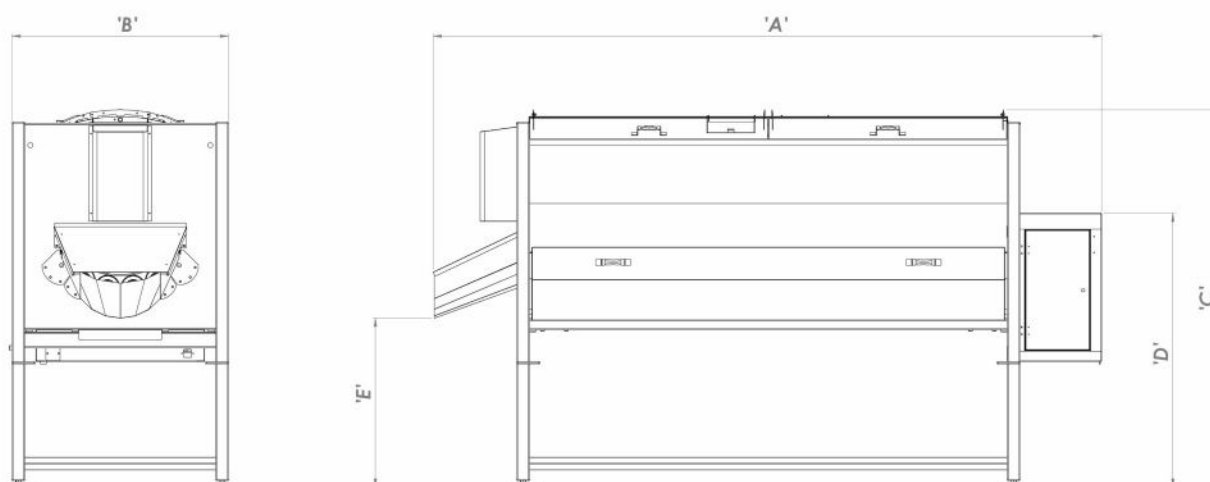

*All dimensions are approximate.*

*If you have any further questions, please contact our Sales Team.*